



SLC Series
Eccentric Disc Pump

Where Innovation Flows

Seal-less Solutions for Chemical Applications

The new generation of Mouvex® Eccentric Disc Pumps, designed to provide premium performance and ultimate safety in chemical and industrial applications.



Benefits:

- Self-priming
- Seal-less Design
- Low Shear Rate
- Consistent Flow Rate
- Strong Suction and Discharge Pressure





Design:

- **Features and Benefits:** Unique seal-less design features a double stainless steel bellows which ensures durability, safety and product containment. The SLC Series provides very high suction and discharge pressures which allows it to self-prime and fully strip lines, maximizing product recovery.
- The SLC can run dry for up to 5 minutes, and the self-compensating eccentric disc principle provides consistent flow rates over a long period of time. The flow rate is extremely accurate even at low speeds.
- There are fewer moving parts, which results in reduced maintenance and downtime.

Application:

- Suitable for most chemical and industrial transfer applications, in particular those that require consistent non-pulsing flow and gentle fluid handling (low shear rates).

Operation:

- **Principle:** Eccentric Disc, positive displacement
- **Installation:** Can be base mounted or cart mounted for mobility

Description of Construction:


- All Stainless Steel construction
- Shaft sealed by double Stainless Steel bellows
- O-ring seals in FKM or coated FKM

Options:

- Bellows Monitoring System (BMS)
- ISO PN 20 flanges / ANSI150 flanges
- ISO PN 16 flanges
- Heating Jacket

Model	Max Speed	Max. Flow Rate	Max. Diff. Pressure
SLC1	1000 rpm	1 m ³ /hr (4.4 gpm)	16 bar (232 psi)
SLC2	1000 rpm	2 m ³ /hr (8.8 gpm)	10 bar (145 psi)
SLC3	1000 rpm	3 m ³ /hr (13.2 gpm)	6 bar (87 psi)
SLC4	750 rpm	4 m ³ /hr (17.6 gpm)	10 bar (145 psi)
SLC8	750 rpm	8 m ³ /hr (35.2 gpm)	6 bar (87 psi)

Model	Max Speed	Max. Flow Rate	Max. Diff. Pressure
SLC12	500 rpm	12 m ³ /hr (52.8 gpm)	9 bar (130 psi)
SLC18	500 rpm	18 m ³ /hr (79.25 gpm)	6 bar (87 psi)
SLC24	450 rpm	24 m ³ /hr (105.6 gpm)	9 bar (130 psi)
SLC36	450 rpm	36 m ³ /hr (158.5 gpm)	6 bar (87 psi)

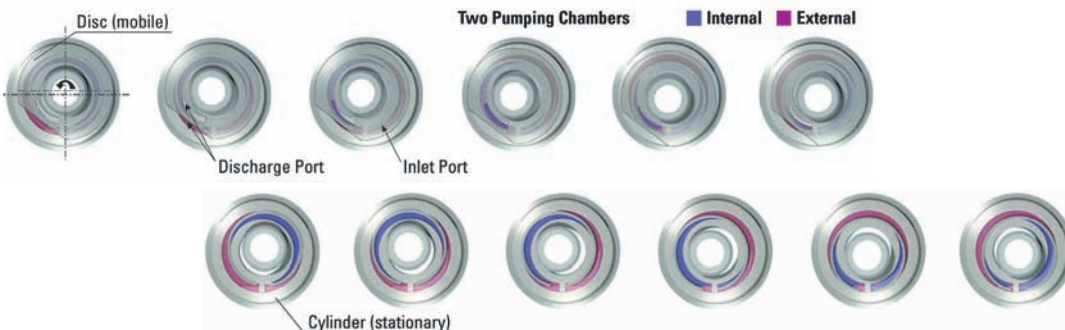

PSG Auxerre
 ZI la Plaine des Isles
 2 rue des Caillottes • F-89000 AUXERRE - FRANCE
 O: + 33.3.86.49.86.30 • F: + 33.3.86.46.42.10
 contact@mouvex.com
 mouvex.com

Authorized PSG® Partner:



Industrial Trading Solutions Ltd
 6 Station Road, Coleshill, West Midlands, B46 1HT
 Tel: 01675 465191 Fax: 01675 464429
 www.industrialtradingsolutions.com
 sales@industrialtradingsolutions.com