



Hygienic Pressure gauge with electrical outputs

Alfa Laval Electronical Pressure Gauge

Application

The Alfa Laval electronic pressure gauge (EPG) is designed to fulfil the demands of a hygienic pressure gauge with electrical output capabilities in the hygienic and pharmaceutical industry. Main features:

- Turnable scale in order to compensate for alternative mounting (350°)
- Adjustable pressure switch feature
- Analogue output (4-20 mA)
- Imbedded led indicator in scale
- Pressure-pulsation and -trend monitoring feature
- Integrated push buttons and digital display for easy setup



TECHNICAL DATA

Accuracy: Class 0.5 ($\pm 0.5\%$ of FS)
 Protection class: IP67

Measuring ranges

- 1 to 1.5 bar
- 0 to 2.5 bar
- 1 to 3 bar
- 0 to 4 bar
- 0 to 6 bar
- 0 to 10 bar
- 0 to 16 bar
- 0 to 40 bar

Electrical data

The integrated electronics features short circuit, reverse polarity and overload protection.

Power supply: 18-36 Vdc
 Power consumption: < 70 mA
 Electrical connection: 4 pin M12 plug

Digital output: logic digital, PNP or NPN
 Max output current: 50 mA
 Response time: > 9 ms

Analogue output: 4-20 mA, 3 wire
 Response time: > 28 ms

Certificates

- 3.1 certificate (option)
- FDA conformity declaration (option)
- Calibration Certificate, 4 points (option)

PHYSICAL DATA

Materials

Wetted parts: AISI 316L
 Fieldhousing: AISI 316L
 Glass: Safety glass 4 mm
 Filling: FDA approved silicone oil

Operating temperature

Wetted parts: -25 to 85°C (140°C < 1 hour)
 Field housing: -20 to 80°C
 Compensated temp. range: . . . 0 to 70°C

Weight: Approx. 500 gr.

Process connection

Clamp DN38 (ISO2852) / Clamp DN40 (DIN32676)

Pressure

Messuring range	Max. over pressure
-1 to 1.5 bar	10 bar
0 to 2.5 bar	10 bar
-1 to 3 bar	30 bar
0 to 4 bar	30 bar
0 to 6 bar	50 bar
0 to 10 bar	50 bar
0 to 16 bar	80 bar
0 to 40 bar	80 bar




Standard range

The Alfa Laval EPG is as standard offered with a DN38 connection, a turnable scale and a digital display with two push buttons for easy setup. Setup is done through the two push buttons and the digital display, this offers the user the possibility to customize the digital and analogue output from the sensor making the EPG ideal for more than just simple pressure monitoring but also pressure switch and pump monitoring applications. Especially in these applications the unique led indication, imbedded in the outer circumference of the scale, offers the possibility to display pressure pulsation, pressure trends and actual set point of the pressure switch locally.

Working principle


The Alfa Laval EPG is based on an internal ceramic pressure sensor which together with the metal diaphragm ensures a proper hygienic process connection. In order to offer the many advanced setup possibilities and the intelligent scale the EPG uses an advanced microprocessor. The Microprocessor controls the embedded led indication in the scale, the output signals and as well the movement of the physical dial. The turnable dial is approved for IP69K, which ensures maximum tightness between the dial and the housing, offering a life time tight closure.

Dimensions (mm)

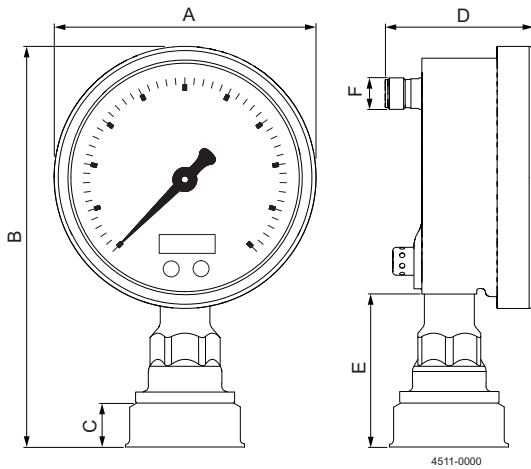

A	B	C	D	E	F
100	181	20	57	87.5	M12 Plug

Electrical connections



PIN 1	Ub+
PIN 2	Ub-
PIN 4 (OUT1)	Binary switching output pressure monitoring
PIN 2 (OUT2)	Analogue output for system pressure

Core colours of sockets:

1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE02102EN 1507

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.